


DS-7004/7008/7016HI-S Standalone DVR



Key Features

- Video loop output interface
- VGA output
- 4 SATA interface
- Support main and auxiliary video output

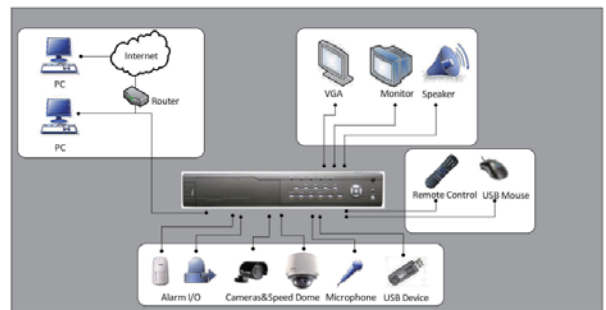

Specifications

		DS-7016HI-S	DS-7008HI-S	DS-7004HI-S
Video/Audio input	Video compression	H.264		
	Video input	16-ch	8-ch	4-ch
	Video input interface	BNC(1.0Vp-p, 75Ω)		
	Audio compression	OggVorbis, 16Kbps	No	OggVorbis, 16Kbps
	Audio input	4-ch	No	4-ch
	Audio input interface	RCA (2.0Vp-p, 1kΩ)	No	RCA (2.0Vp-p, 1kΩ)
	Voice talk input	1-ch, (Using 1st channel of Audio IN)	No	1-ch, (Using 1st channel of Audio IN)
Video/Audio output	Preview resolution	4CIF (PAL: 704x576, NTSC: 704x480)		
	VGA output	1, resolution: 800×600/60Hz, 1024×768/60Hz, 1280×1024/60Hz		
	Recording resolution	2CIF/CIF/QCIF		
	Video output	1-ch, BNC(1.0Vp-p, 75Ω)		
	Video spot out	1-ch, BNC(1.0Vp-p, 75Ω)		
	Video loop out	16-ch	8-ch	4-ch
	Frame rate	2CIF: 8fps CIF: 25(P)/30(N) fps		4CIF: 8fps DCIF: 8fps 2CIF: 15fps CIF: 25(P)/30(N) fps
	Stream type	Video/Video&Audio(ch1-4)	Video	Video/Video&Audio
Video bit rate	32Kbps~2Mbps, or user-defined (Max. 8Mbps)			
Audio output	1 channel, RCA (Linear Electrical Level, 600Ω)	No	1 channel, RCA (Linear Electrical Level, 600Ω)	
Hard disk driver	Interface type	4 SATA interface (4 SATA HDDs, or 2 SATA HDDs with 1 SATA CD-RW/DVD-RW)		
	Capacity	Each interface supports up to 2TB capacity		
External interface	Communication interface	1 RJ45 10M/100M adaptive Ethernet interface, 1 RS232 interface (DB9), 1 RS485 interface (T+,T-,R+,R-)		
	USB interface	1 USB interface, can support USB disk, USB HDD, USB DVD-R/W and CD-R/W		
	Alarm input	16-ch	16-ch	4-ch
	Alarm output	4-ch	4-ch	2-ch
General	Power supply	100~240VAC, 6.3A, 50~60Hz		
	Consumption	≤70W (without HDD or DVD-R/W)		
	Working temperature	-10°C~+55°C		
	Working humidity	10%~90%		
	Dimension (mm)	440mm(W)x390mm(D)x70mm(H)		
	Weight	≤8Kg (without HDD or DVD-R/W)		